Master advanced technology to improve automotive components

BAOLONG



PRODUCT CATALOGUE

AIR RESERVOIR & ALUMINUM PARTS

About Baolong Automotive

1997 5 2017 603197

6600

EGR

“ ” “ ”

Shanghai

Enterprise Honors

;ĚбџбŽő TĚůĻP ŊŌšĶĻ śŽ TřĻ ŹĚŽĪ ıĻâšøıĚŤšбŽP ĚŽķ řбŽбŌP TřĚŤ 0Ļ ıббŹšúĻ бŌ0 TĚџĻŽT TĻıřŽбџббĩĪ ĚŽķ řĚ0ķ ŊJбŌů

/ CĻâiøıĚtions



ąÃ¢
ISO 26262 Baolong Automotive



<{ Ã
<{ Ã s ;ĚбџбŽő Automotive

ąÃ¢
ISO 14001 Baolong Automotive



ąÃ¢
ISO 14001 Ningguo Branch



IAÊX
IATF 16949 Ningguo Branch



ąÃ¢ Ningguo Branch



à ÊX
IATF 16949 Baolong Automotive



ąÃ¢
ISO 14001 Anhui Plant



FŻĻ0ŏĭ yĚŽĚŏĻŹĻŽT ÃĭPTĻŹ <Ļâšøı ĚTĻ

& / CustomĻr & GovĻrnmĻnt AwĚrķs



¾
Ford Q1 Preferred Quality Status



WŒâř YŒĚķĻ ÃŒŊŊ¿ĻŒ



Geely Excellent Supplier



LiAuto Spirit Award



GM Supplier Quality Excellence Award



çolkswagen Grade Supplier



Faurecia Global Supplier



{ĚTšбŽĚ‖ 0Ļ ıббŹšúĻķ FŻTĻŌŊ0šPĻ
Technology Center




ıĚķĻŹšıšĚŽ FĬĴŊĻâ è Б0ůPTĚTšбŽ




{ĚTšбŽĚ‖ ąŽTĻ‖ĻıTŒĚ‖ ¼0бŊŊâĭ
Advantage Enterprise

Test Capability

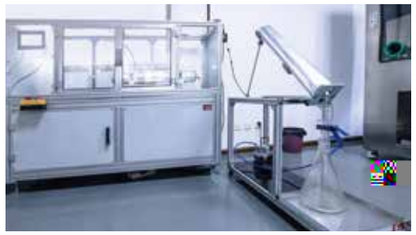

/ ð¿ĻPĻÈĐð <ıĻĖŽı§ŽĻPP
Extraction Equipment

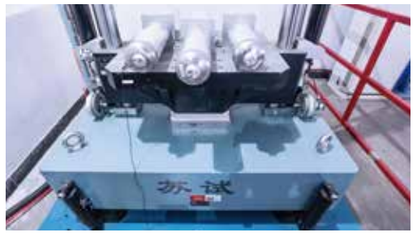

/ Shock Test Bench



/ Cleanliness Test Equipment



/ Circulating Salt Spray Test Chamber



/ Proof Pressure Testing Machine



yĻTĖµĐőŒÑřš BĻTĻıTĐ0



çšÍ0ĚŧŠŽ ĖĻPT ;ĻŻıř



X í 0ĚŤ BĻTĻıTŠŠŽ

Manufacturing



/ Plant



/ End Cover Stretching



/ Machining Area



/ Spining Process




/ Automatic Welding



/ Helium Test



/ Stereoscopic Warehouse

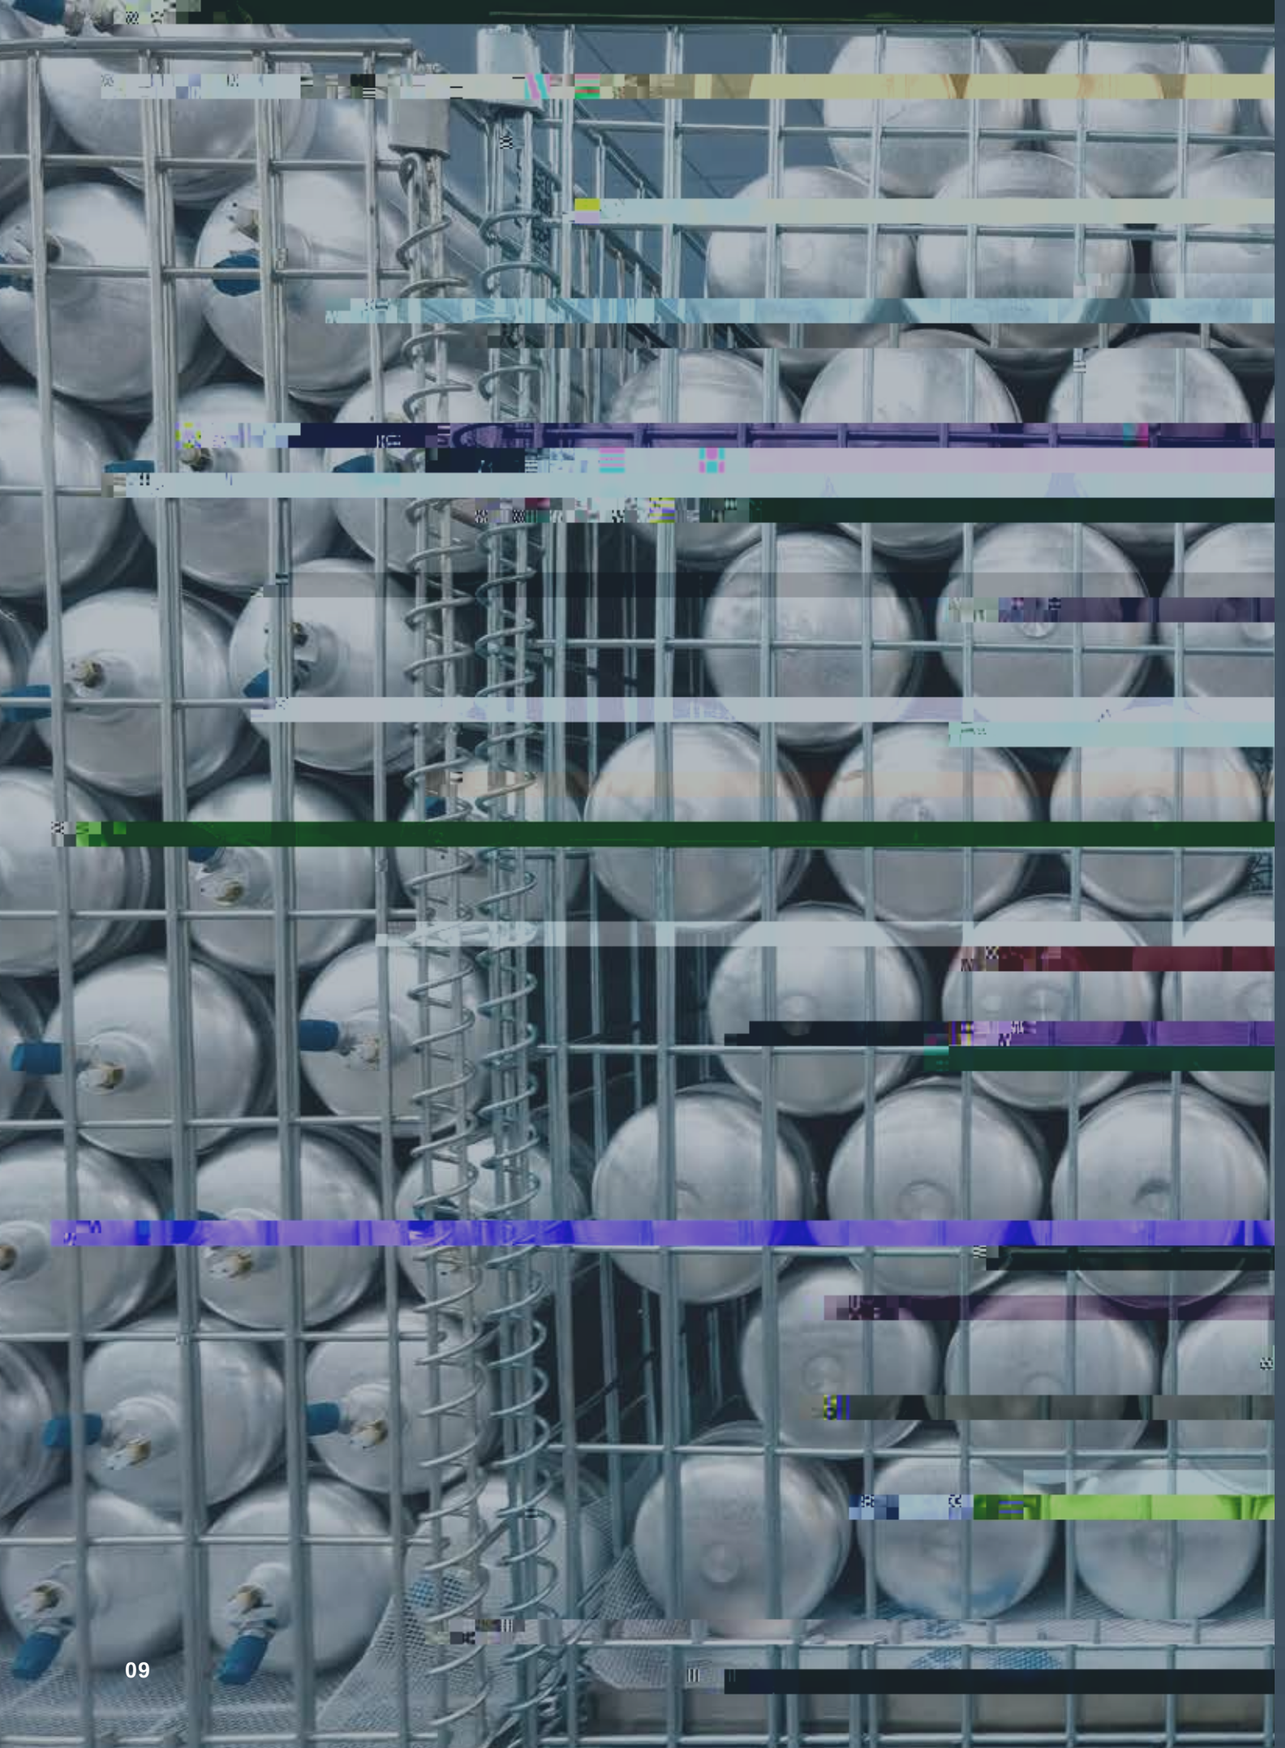

CONTENTS

11-14 AIR RESERVOIRS

15-20 ALUMINUM PARTS

15 PISTON

16 TOP CAP AIR CHAMBER ALUMINUM FRAME

17 GUIDING TUBE

18 LIQUID STORAGE TANK


19 CONNECTORS & BRACKETS

/ Type: AT006



/ Parameter
aŻPTĚщĚTšÐŻ ĂTŤцĻ Bracket
φ123×φ123×1140mm
ĂšúĻ φ123×φ123×1140mm
12L
çÐцŐŹĻ 12L
2.5kg
èĻšőřT 2.5kg
0-18bar
èÐ0ůšŽő ¼0ĻPPŐ0Ļ 0-18bar

/ Type: AT009

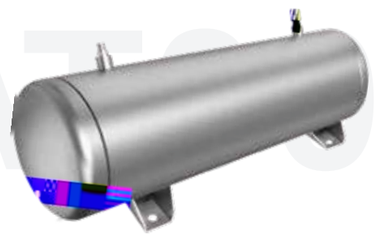


/ Parameter
aŻPTĚщĚTšÐŻ ĂTŤцĻ Bracket
φ150×φ150×588mm
ĂšúĻ φ150×φ150×588mm
9L
çÐцŐŹĻ 9L
2.5kg
èĻšőřT 2.5kg
0-20bar
èÐ0ůšŽő ¼0ĻPPŐ0Ļ 0-20bar

/ Type: AT030



/ Parameter
aŻPTĚщĚTšÐŻ ĂTŤцĻ Bracket
162×114.8×950mm
ĂšúĻ 162×114.8×950mm
6L
çÐцŐŹĻ 6L
5.3kg
èĻšőřT 5.3kg
0-20bar
èÐ0ůšŽő ¼0ĻPPŐ0Ļ 0-20bar

/ Type: AT013

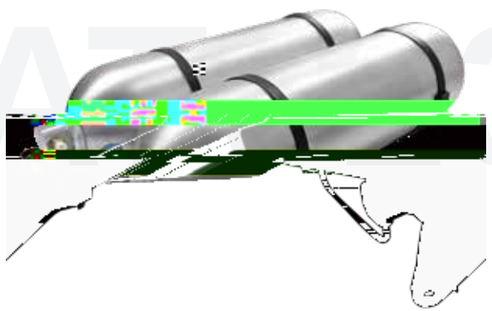

/ Parameter
aŻPTĚщĚTšÐŻ ĂTŤцĻ Plastic Tray
260×123×463mm
ĂšúĻ 260×123×463mm
8L
çÐцŐŹĻ 8L
2.5kg
èĻšőřT 2.5kg
0-18bar
èÐ0ůšŽő ¼0ĻPPŐ0Ļ 0-18bar

/ TypĻ DS

/







GUIDING TUBE

/ TypĻ DS

/ Parameter

φ154×φ154×120mm

ÃšÚĻ φ154×φ154×120mm

6063

y ĚTĻ0šĚų 6063



/ TypĻ DS



/ Parameter

φ142×φ142×123mm

ÃšÚĻ φ142×φ142×123mm

6063

y ĚTĻ0šĚų 6063

/ TypĻ DS

/ Parameter

φ135.5×φ135.5×110mm

ÃšÚĻ φ135.5×φ135.5×110mm

6063

y ĚTĻ0šĚų 6063



LIQUID STORAGE TANK

/ TypĻ AS

/ Parameter

φ35×φ35×280mm

ÃšÚĻ φ35×φ35×280mm

6060

y ĚTĻ0šĚų 6060



/ TypĻ AS



/ Parameter

40×70×343.5mm

žŽPTĚųĚŤšĎŽ ĂTŤųĻ 40×70×343.5mm

3003

y ĚTĻ0šĚų 3003

ALUMINUM PARTS

/ TypĻ AS

Parameter
8×24.6×51.6mm
ÃšÚĻ 8×24.6×51.6mm
6061
y ĚTĻ0šĚų 6061

/ TypĻ AS

/ Parameter
40×24×31.5mm
ÃšÚĻ 40×24×31.5mm
6063
y ĚTĻ0šĚų 6063



/ TypĻ AS



/ Parameter
22×28×51.6mm
ÃšÚĻ 22×28×51.6mm
3003
y ĚTĻ0šĚų 3003

/ TypĻ AS

/ Parameter
50.8×60.9×71.5mm
ÃšÚĻ 50.8×60.9×71.5mm
6061
y ĚTĻ0šĚų 6061



/ TypĻ SH



/ Parameter
>26×φ26×32.5mm
ÃšÚĻ >26×φ26×32.5mm
6061
y ĚTĻ0šĚų 6061

/ TypĻ AS

/ Parameter
26×35×88.5mm
ÃšÚĻ 26×35×88.5mm
6005
y ĚTĻ0šĚų 6005





ShĔnghĔi BĔolong AutomotivĻ CorporĔtion